

# FOCUSED ON TOUGH JOBS AND SIGNLE USE DURABILITY.







## Megaman® Green


ABSORBENT-LINED NITRILE GLOVES WITH ENERGEL

**Tested and certified for protection against viruses (EN ISO374-5)**

**FEEL THE SW DIFFERENCE WITH ULTIMATE PROTECTION. WE'VE COMBINED ABRASION RESISTANCE WITH SWEAT MANAGEMENT PLUS SOOTHING ENERGEL FOR HAND HEALTH.**

- EnerGel inner coating soothes and moisturizes dry and chapped skin
- DriTek comfort technology with absorbent lining that wicks away moisture for added extended use
- ANSI/EN Level 3 abrasion resistance for protection and extended wear
- 11" extended cuff for additional protection
- Fully textured surface for superior wet and oily grip
- Bright green for high visibility
- Up to 3x longer lasting than standard nitrile gloves
- Optimal thickness for durability and tactile sensitivity
- SHA Dermatologically Approved

MM				
WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 12.8g (large size)	 11"	 8.5 mil	DriTek® EnerGel™	 HI-VIS GREEN

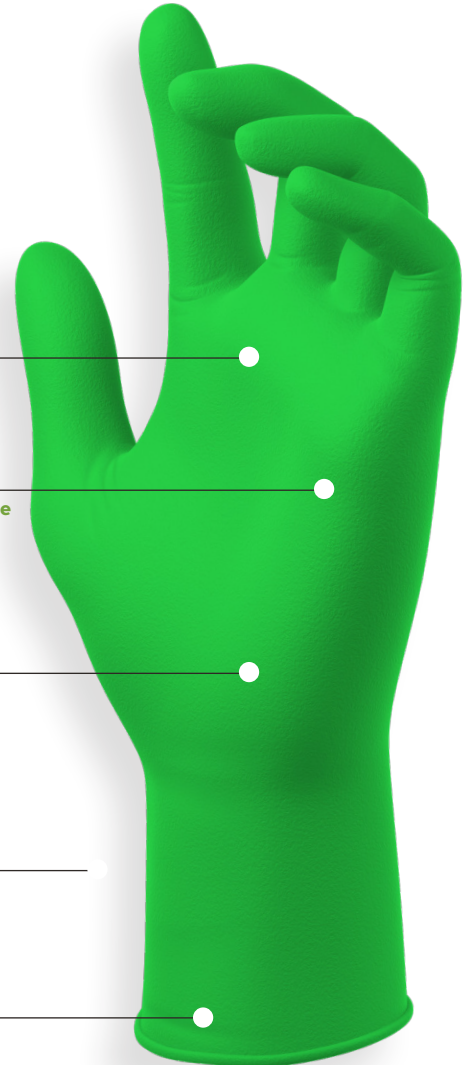

Previously known as AloeTuff

**EcoTek™**  
BIODEGRADABLE



# SafetyMate

## TECHNICAL DATA



ABSORBENT-LINED NITRILE EXAM GLOVES WITH ENERGEL

### PRODUCT DESCRIPTION

#### SPECIFICATIONS

PRODUCT	MegaMan
GRADE	Powder-Free Exam
MATERIAL	Nitrile
THICKNESS FINGER	10.1mil 0.26mm
PALM	8.5 mil 0.22mm
COLOR	Hi-Vis Green
SURFACE OUTER	Fully Textured
INNER	DriTek / Energel
LENGTH	11" 280 mm
WEIGHT	12.8 g
FIT TYPE	Ambidextrous
CUFF TYPE	Beaded
WATERTIGHT AQL	1.5
ORIGIN COUNTRY	China

#### PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	17 MPa	16 MPa
ELONGATION:	560%	520%

#### INTEGRATED TECHNOLOGIES

**DRITEK**® lining wicks moisture away from skin

**ENERGEL**™ is the most advanced Aloe coating, delivering 2x times more soothing gel than previous technologies

100% air inspected



\* Specifications based on size Large glove

### STANDARDS & CERTIFICATIONS

EN 420:2003	FDA 21 CFR 177.2600
REACH EU 1907/2006	Component materials
EU 2016/425	comply with FDA
ANSI/ISEA 105-2016	regulations for food
CAT III COMPLEX DESIGN	contact
TGA LISTED (ARTG# 334926)	



### APPLICATIONS

- Assembly
- Chemical Handling
- Fabrication
- Janitorial Maintenance
- Light Machining Operations
- Maintenance
- Waste Management

### ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N663412	S 6½ – 7	3.4" 87mm	50 gloves per box 10 boxes per case
N663413	M 7½ – 8	3.8" 97mm	50 gloves per box 10 boxes per case
N663414	L 8½ – 9	4.3" 109mm	50 gloves per box 10 boxes per case
N663415	XL 9½ – 10	4.5" 114mm	50 gloves per box 10 boxes per case
N663416	2XL 10½ – 11	4.9" 125mm	50 gloves per box 10 boxes per case

### STORAGE

Keep out of sunlight. Store in a cool, dry place. Keep away from sources of ozone or ignition.



**EcoTek**™  
BIODEGRADABLE

### FINALLY. BIODEGRADABILITY WITHOUT PERFORMANCE LOSS.

Ecotek is a nitrile treatment that accelerates the break-down in landfills without performance loss. Ecotek gloves biodegrade in landfill, 92.6% in 2 ½ years tested according to ASTM D5526-12. SW is changing the future of disposable gloves with Ecotek, an innovative solution that contributes to a cleaner environment for a better tomorrow.

